

# Fillflex™ Compact Sequence

Fills up to four in a sequence

**FILLFLEX**

– the flexible filling machines

**Fillflex Compact Sequence**  
for three fillings in a sequence  
(model TF5500CS328320  
equipped with impeller pump)



Fillflex Compact Sequence is a handy addition to the Fillflex family. With just one filling machine you can fill up to four containers in a row, one after another. When they are transported to the sealing station, four new containers are fed into position. As switching between containers in the sequence is done in fractions of a second, you will get even higher capacity from your Fillflex Compact.

## Products

Fillflex Compact can handle virtually all types of fluid, including highly viscous and frothing liquids.

It is used for filling jam and marmalade, marzipan, custard, sauce, paté, dressing, preservatives, yoghurt, mayonnaise, honey, washing-liquid, shampoo, degreasers, hand-cream, paint, acid, oil and other substances.

## Containers

The machine can be easily adapted to suit many different types of container – everything from 10 ml bottles to dishes, jars, barrels, drums and vats. It is very easy to alter or adjust the chosen filling volume. Up to 8 pre-selected options can be stored.

## Capacity

Up to 50 lit./min., depending on type of filling and product properties.

## Power connection

230 V single-phase, earthed (standard earthed socket, no permanent connection is required).


It features connectors for external start-up and communication with a conveyor system etc.

## Dimensions and weight

Length: approx. 650 mm Width: 250 mm

Height: 400 mm

Weight: approx. 25 kg

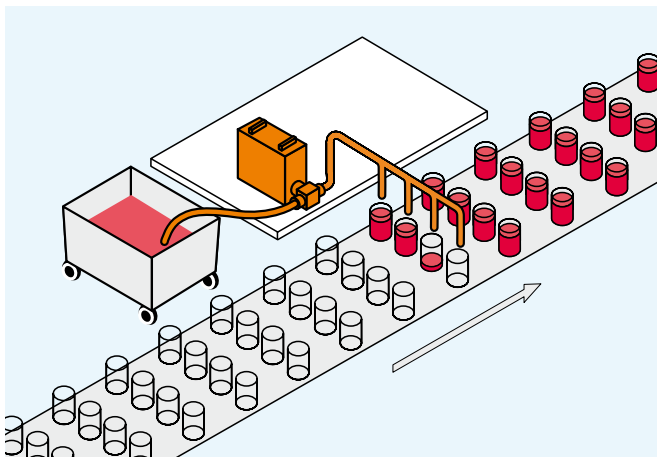

Fillflex Compact Sequence fills up to four containers in a row, one after another.

## Models/ordering numbers

### Fillflex Compact Sequence equipped with gear pump

This is the most common pump and suitable for both thin and viscous products, without solid particles. 25 mm SMS connection.



#### Gear pump, max. capacity 8 lit./min. (0,006 lit./revolution)

F5500CS2M200 for 2 fillings in a sequence

F5500CS3M200 for 3 fillings in a sequence

F5500CS4M200 for 4 fillings in a sequence

#### Gear pump, max. capacity 13 lit./min. (0,010 lit./revolution)

F5500CS2M210 for 2 fillings in a sequence

F5500CS3M210 for 3 fillings in a sequence

F5500CS4M210 for 4 fillings in a sequence

#### Gear pump, max. capacity 25 lit./min. (0,018 lit./revolution)

F5500CS2M220 for 2 fillings in a sequence

F5500CS3M220 for 3 fillings in a sequence

F5500CS4M220 for 4 fillings in a sequence

### Fillflex Compact Sequence equipped with impeller pump

The impeller pump is suitable for products which also can contain solid particles, such as stews, sauces etc. 25 mm SMS connection.



#### Impeller pump, max. capacity 35 lit./min. (0,023 lit./revolution)

F5500CS228220 for 2 fillings in a sequence

F5500CS328220 for 3 fillings in a sequence

F5500CS428220 for 4 fillings in a sequence

#### Impeller pump, max. capacity 60 lit./min. (0,053 lit./revolution)

F5500CS228320 for 2 fillings in a sequence

F5500CS328320 for 3 fillings in a sequence

F5500CS428320 for 4 fillings in a sequence



Fillflex Compact Sequence equipped with hose valves for three fillings in a sequence.